


P.C.B. LAYOUT

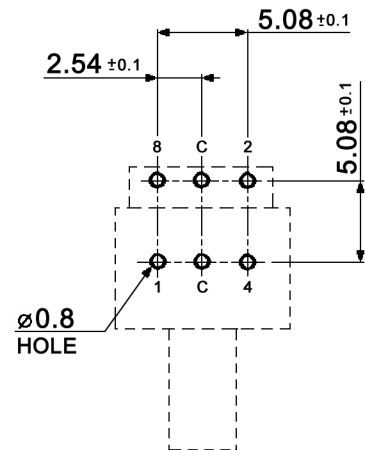

Specifications:

- Contact rating: switching: 25mA, 24V DC  
non-switching: 100mA
- Contact resistance: 100mOhm max.
- Insulation resistance: 1 000MOhm min. at 100V DC
- Dielectric strength: 250V AC, 50Hz for the duration of 1 minute
- Operating temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Mechanical life: 2 000 cycles
- Soldering conditions: 260 +/-5°C, 5 +/-5sec.
- Construction: washable
- Material: Terminals: tin plated over nickel  
Case / rotor: PBT, UL94V-0

Compliance: RohS III (2015/863/EU)

Tolerances: 0-1: ±0.03mm 1-4: ±0.05mm 4-16: ±0.07mm	Date	Name	<h1>DRR 21xxx</h1>
	02/12	dr	
Temperature	02/23	dr	<h2>30 25 44</h2>
Modifications	Date	Name	
			Page 1/2

		real BCD-coded			
		1	2	4	8
10 P o s i t i o n s	0				
	1	●			
	2		●		
	3	●	●		
	4			●	
	5	●		●	
	6		●	●	
	7	●	●	●	
	8				●
	9	●			●

		invers BCD-coded			
		1	2	4	8
10 P o s i t i o n s	0	●	●	●	●
	1		●	●	●
	2	●		●	●
	3			●	●
	4	●	●		●
	5		●		●
	6	●			●
	7				●
	8	●	●	●	
	9		●	●	

		real hex-coded			
		1	2	4	8
16 P o s i t i o n s	0				
	1	●			
	2		●		
	3	●	●		
	4			●	
	5	●		●	
	6		●	●	
	7	●	●	●	
	8				●
	9	●			●
	A		●		●
	B	●	●		●
	C			●	●
	D	●		●	●
	E		●	●	●
	F	●	●	●	●

		invers hex-coded			
		1	2	4	8
16 P o s i t i o n s	0	●	●	●	●
	1		●	●	●
	2	●		●	●
	3			●	●
	4	●	●		●
	5		●		●
	6	●			●
	7				●
	8	●	●	●	
	9		●	●	
	A	●		●	
	B			●	
	C	●	●		
	D		●		
	E	●			
	F				

xxx	Code	Rotor
010	real BCD-coded, 10pcs.	white
110	invers BCD-coded, 10pcs.	red
016	real hex-coded, 16pcs.	white
116	invers hex-coded, 16pcs.	red

Compliance: RohS III (2015/863/EU)

Tolerances: 0-1: ±0.03mm 1-4: ±0.05mm 4-16: ±0.07mm	Date	Name	<b>DRR 21xxx</b>
	02/12	dr	
Temperature	02/23	dr	<b>30 25 44</b>
Modifications	Date	Name	
			Page 2/2