

Microminiature Rotary Coded Switches


Specifications:

Contact rating:	50 V DC, 100 mA, non-switching 15 V DC, 30 mA, switching
Contact resistance:	< 200 mΩ
Insulation resistance:	> 1000 MΩ at 250 V DC
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-25 °C to +85 °C
Mechanical life:	minimum 20 000 operations
Contacts:	gold-plated
Terminals:	PC terminals, phosphor bronze, gold-plated
Material:	case: PPS, black frame: stainless steel rotor: PA, standard types yellow; inverse types red
Construction:	case totally sealed, suitable for washing by immersion
Mounting:	on pc-board
Soldering conditions:	wave-soldering – max.: 5 sec, 260 ±3 °C

washable

Models: Code

DRS 7010	BCD
DRS 7110	BCD Inverse
DRS 7016	Hexadecimal
DRS 7116	Hexadecimal Inverse

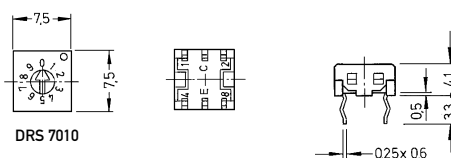

DRR 7010	BCD
DRR 7110	BCD Inverse
DRR 7016	Hexadecimal
DRR 7116	Hexadecimal Inverse

