


**BCD inverse**


		Complement coded			
		C	1	2	4 8
10 Positions	0	●	●	●	●
	1	●		●	●
	2	●	●		●
	3	●			●
	4	●	●	●	●
	5	●		●	●
	6	●	●		●
	7	●			●
	8	●	●	●	●
	9	●		●	●

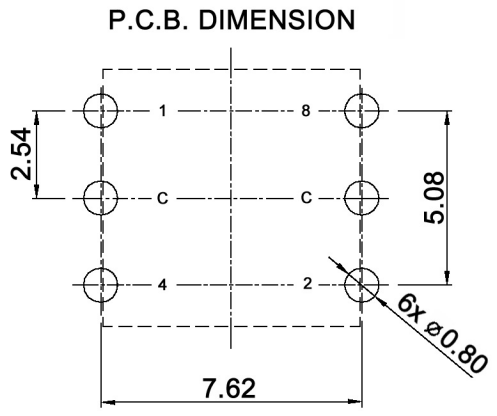

**Specifications:**

- Contact rating:** non-switching: 400mA, 42V  
switching: 100mA, 42V
- Contact resistance:** 80mOhm max.
- Insulation resistance:** 100MOhm min. at 250V DC for 1 minute +/-5sec.
- Dielectric strength:** 250V DC (50Hz/60Hz) for 1 minute
- Operating temperature:** -50°C to +125°C
- Storage temperature:** -55°C to +135°C
- Mechanical life:** 25 000 cycles
- Operating force:** 120 +/-30gf/cm
- Soldering conditions:** auto-soldering: max.: 260 +/-5°C, 5 +/-1sec.  
IR reflow soldering: see profile
- Packaging unit:** 70 pcs / tube
- Material:** Cover / spring plate / guide plate: stainless steel  
Contact / terminal: phosphor bronze, min. 0.07µm gold plated over min. 0.3µm nickel  
Rotor / base: PA66  
O-ring: silicone  
Actuator color: orange

**Protection:** IP67  
**Soldering conditions:**

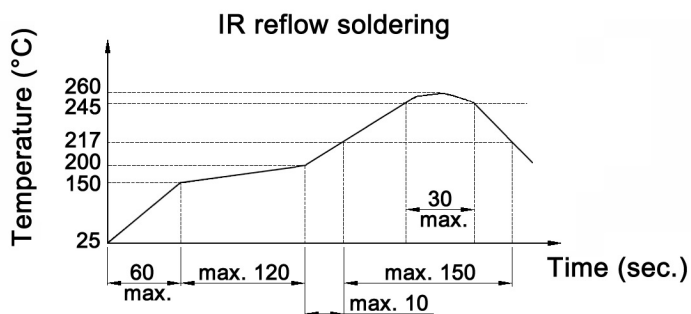

Tolerances:	Date	Name
	10/08	dr
Packaging unit	09/12	dr
Modifications	Date	Name

DRS 15110

30 16 25

knitter-switch