

# Subminiature Rotary Coded Switches waterproof




## Specifications:


Contact rating:	switching: 150 mA, 42 V non-switching: 200 mA, 42 V
Contact resistance:	< 80 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	250 V, 50 Hz for the duration of 1 minute
Operating temperature:	-40 °C to +85 °C
Storage temperature:	-40 °C to +85 °C
Mechanical life:	minimum 10 000 operations
Terminals:	phosphor bronze, gold-plated over nickel barrier
Material:	case: PA6T meets UL 94 V-0, cover light grey, base black rotor: grey, inverse type beige
Protection:	IP 67
Mounting:	on pc-board with spacing 2.54 mm
Soldering conditions:	wave-soldering – max. 10 sec, 260 °C pre-heat – max. 70 sec, max. 120 °C

## Models: Code


DRS 60010 BCD  
 DRS 60110 BCD Inverse  
 DRS 60016 Hexadecimal  
 DRS 60116 Hexadecimal Inverse

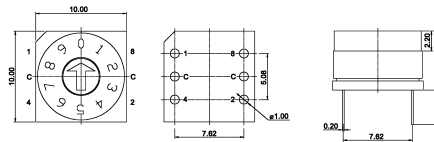


DRS 61010 BCD  
 DRS 61110 BCD Inverse  
 DRS 61016 Hexadecimal  
 DRS 61116 Hexadecimal Inverse

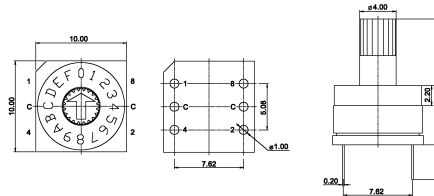

DRR 60010 BCD  
 DRR 60110 BCD Inverse  
 DRR 60016 Hexadecimal  
 DRR 60116 Hexadecimal Inverse

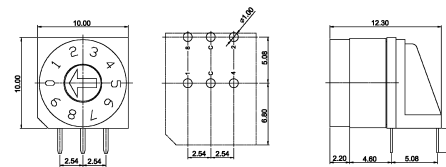

## Special version:



Spacing 2.54 mm

Additional to type number: -1

Example for order: DRR 60010-1

