


Subminiature Rotary Coded Switches for SMT, waterproof

Specifications:


| | |
|------------------------|---|
| Contact rating: | switching: 150 mA, 42 V non-switching: 200 mA, 42 V |
| Contact resistance: | < 80 mΩ |
| Insulation resistance: | > 100 MΩ |
| Dielectric strength: | 250 V, 50 Hz for the duration of 1 minute |
| Operating temperature: | -60 °C to +125 °C |
| Storage temperature: | -60 °C to +125 °C |
| Mechanical life: | minimum 10 000 operations |
| Terminals: | phosphor bronze, gold-plated over nickel barrier |
| Material: | case: PA6T grey meets UL 94 V-0 rotor: PA 66 grey, inverse type blue |
| Protection: | IP 67 |
| Mounting: | on pc-board |
| Packing: | 600 pcs/reel |

Models: Code

| | |
|-----------|---------------------|
| SMR 60010 | BCD |
| SMR 60110 | BCD Inverse |
| SMR 60016 | Hexadecimal |
| SMR 60116 | Hexadecimal Inverse |

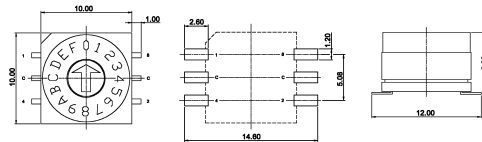

| | |
|-----------|---------------------|
| SMR 61010 | BCD |
| SMR 61110 | BCD Inverse |
| SMR 61016 | Hexadecimal |
| SMR 61116 | Hexadecimal Inverse |

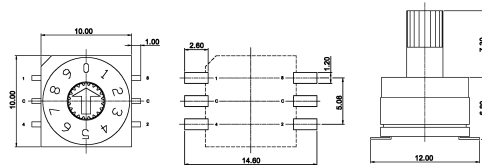

washable

