

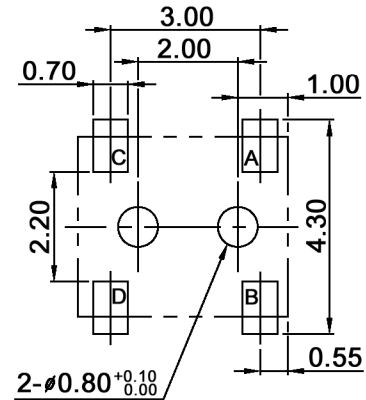
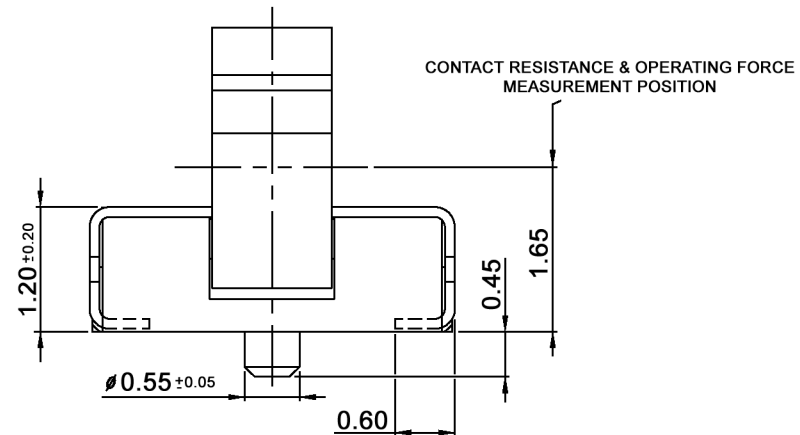


P.C.B. LAYOUT

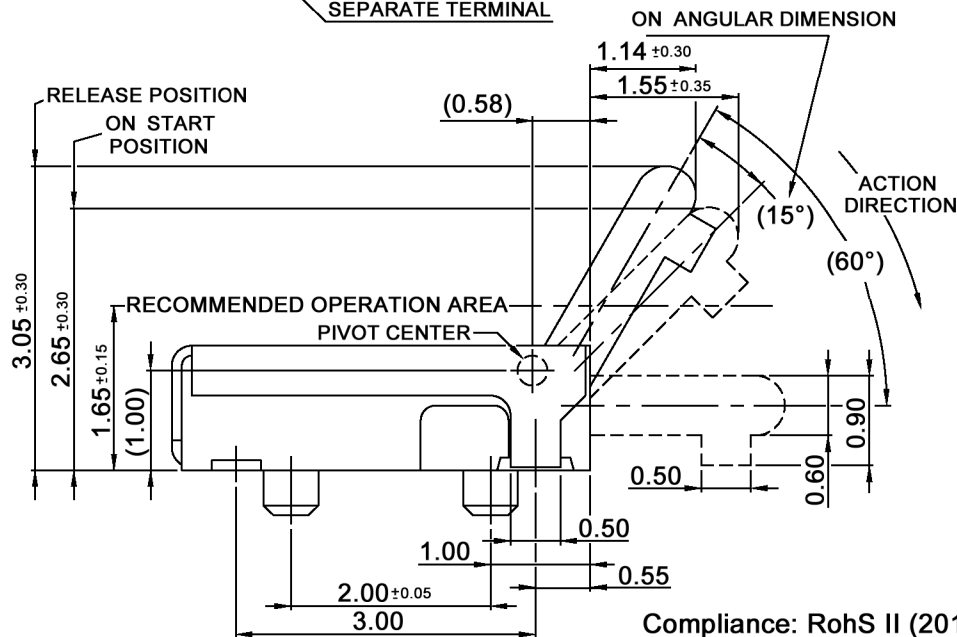

CIRCUIT DIAGRAM



Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm			Date	Name
			08/15	dr
Packaging	02/16	dr	knitter-switch	
Modifications	Date	Name		

DTS 205 CP-J-T

30 34 09


Page

1/3

Specifications:

Contact rating: 50µA, 3V DC to 10mA, 5V DC
 Contact resistance: 10hm max.
 Insulation resistance: 100MOhm min. at 100V DC for 1 minute +/-5sec.
 Dielectric strength: 100V AC (50Hz or 60Hz) for 1 minute
 Operating temperature: -40°C to +85°C
 Storage temperature: -40°C to +85°C
 Operating force: 40gf max.
 Mechanical life: 50 000 cycles min.
 Stop strength: 1kg for 60sec.
 Material: Cover: nickel silver
 Stem / base: high-temp. thermoplastic nylon UL94V-0, molded black
 Contact: copper alloy, gold plated
 Terminal: brass, silver plated
 Silicone: silicone, molded black

Soldering conditions:

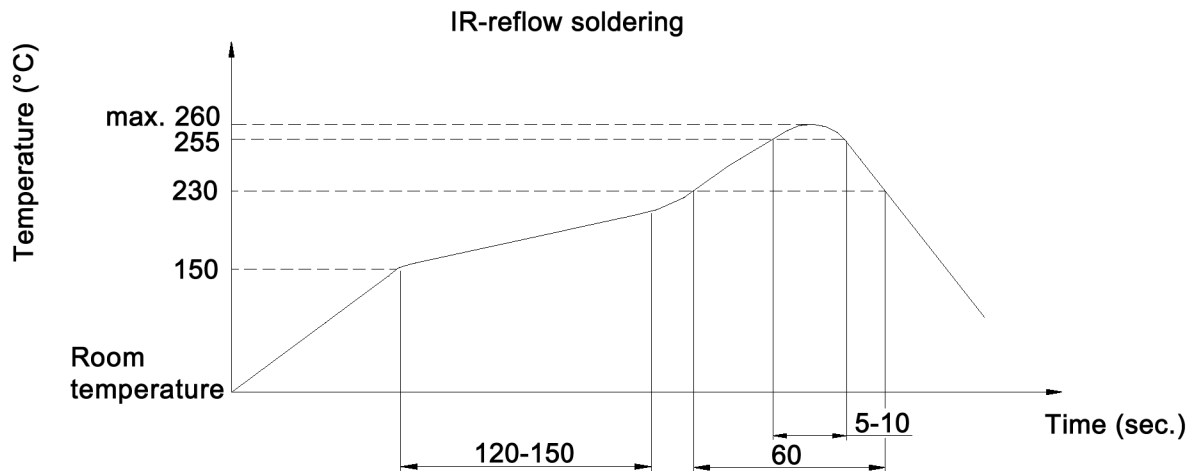

Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm		Date	Name	DTS 205 CP-J-T
		08/15	dr	
		knitter-switch		30 34 09
				Page
				2/3
Modifications	Date	Name		

