
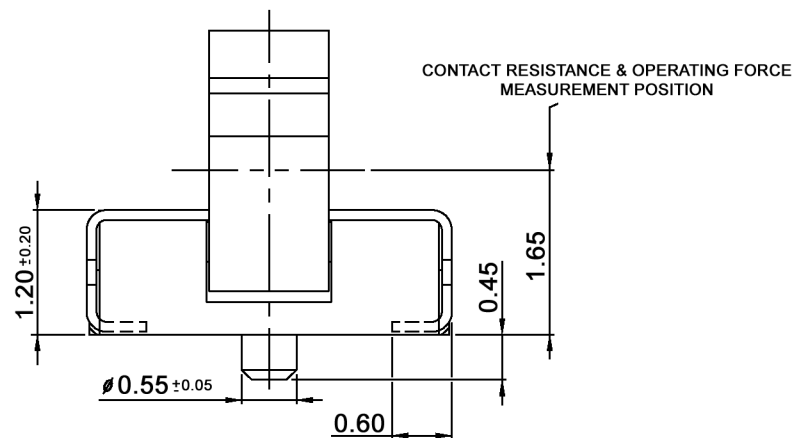
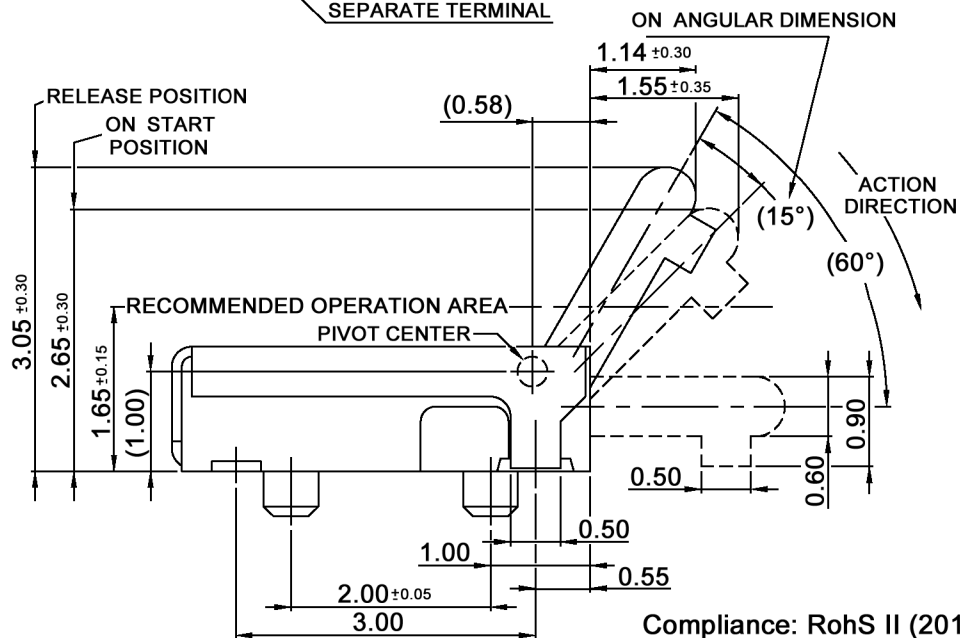


CIRCUIT DIAGRAM



Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm			Date	Name
			08/15	dr
Packaging	02/16	dr	<b>knitter-switch</b>	
Modifications	Date	Name		

**DTS 205 CP-J-T**

**30 34 09**


Page

1/3

**Specifications:**

**Contact rating:** 50µA, 3V DC to 10mA, 5V DC  
**Contact resistance:** 10hm max.  
**Insulation resistance:** 100MOhm min. at 100V DC for 1 minute +/-5sec.  
**Dielectric strength:** 100V AC (50Hz or 60Hz) for 1 minute  
**Operating temperature:** -40°C to +85°C  
**Storage temperature:** -40°C to +85°C  
**Operating force:** 40gf max.  
**Mechanical life:** 50 000 cycles min.  
**Stop strength:** 1kg for 60sec.  
**Material:** Cover: nickel silver  
 Stem / base: high-temp. thermoplastic nylon UL94V-0, molded black  
 Contact: copper alloy, gold plated  
 Terminal: brass, silver plated  
 Silicone: silicone, molded black

**Soldering conditions:**

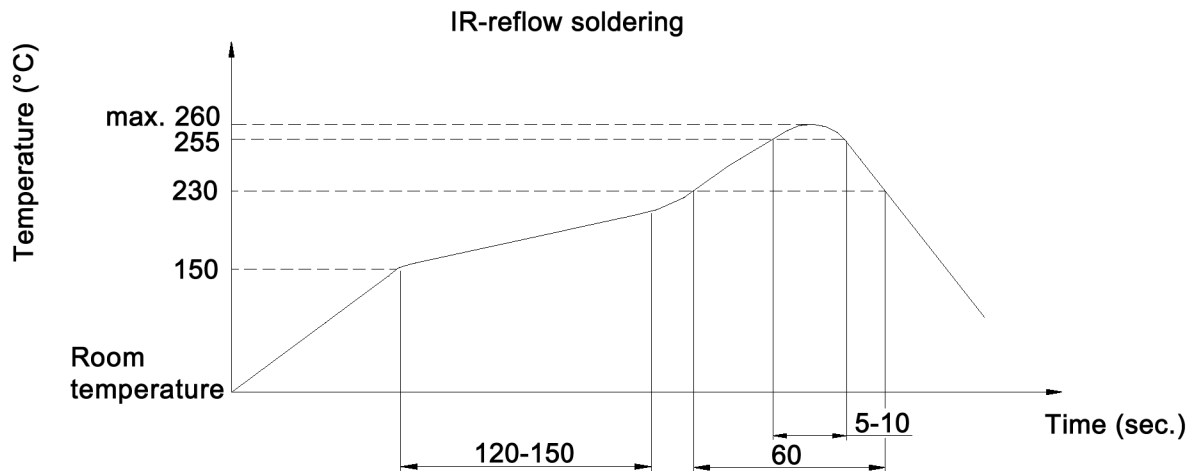

**Compliance: RohS II (2011/65/EU)**

Tolerances: max. ±0.20mm		Date	Name	<b>DTS 205 CP-J-T</b>
		08/15	dr	
		<b>knitter-switch</b>		<b>30 34 09</b>
				Page
				2/3
Modifications	Date	Name		

