


P.C. LAYOUT

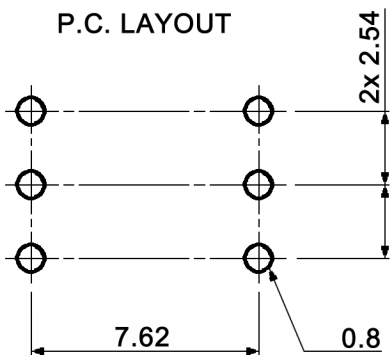

Tolerances: ≤6: ±0.2mm 6-18: ±0.4mm	Date	Name
	08/09	dr

TME 1

knitter-switch

30 19 05

Page

1/2

Modifications	Date	Name
---------------	------	------

Specifications:

Contact rating: 50mA, 48V DC, max. 1W
 Contact resistance: 100mOhm max.
 Insulation resistance: 100MOhm min. at 100V DC
 Dielectric strength: 250V, 50Hz for the duration of 1 minute
 Operating temperature: -25°C to +70°C
 Mechanical life: min. 300 000 cycles
 Operating force: 2.0N
 Soldering conditions: auto-soldering: max.: 275 +/-10°C, 6sec.
 Switching function: off - mom
 Mounting: on pc-board
 Material: Terminals: PC terminals
 Contacts: phosphor bronze, silver plated
 Case: 6TPA resin, washable
 Frame: stainless steel
 Button: perbunan, black

CIRCUIT CHARACTERISTICS

Circuit arrengment		Diagram	Terminals
free off	push (on)		6
—	(1) (2) (3) (4)		



Tolerances: ≤6: ±0.2mm 6-18: ±0.4mm		Date	Name	<h1>TME 1</h1>
		08/09	dr	
			knitter-switch	<h2>30 19 05</h2>
Modifications		Date	Name	Page 2/2