


toggle shown in pos. 2

P.C.B. LAYOUT

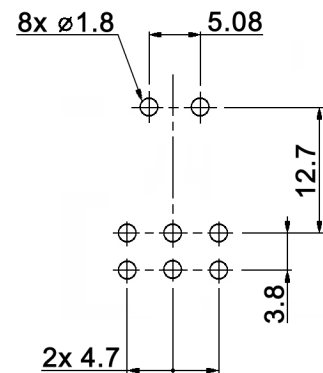

x	SWITCHING FUNCTION			
N	ON - ON	1-2 4-5	NONE	2-3 5-6
P	ON - OFF - ON	1-2 4-5	OFF	2-3 5-6
R	MOM - ON	1-2 4-5	NONE	2-3 5-6
S	MOM - OFF - MOM	1-2 4-5	OFF	2-3 5-6
T	MOM - OFF - ON	1-2 4-5	OFF	2-3 5-6
PA	ON - ON - ON	1-2 4-5	2-3 4-5	2-3 5-6

Compliance: RohS II (2011/65/EU)

Tolerances: ±0.15mm			Date	Name	<h1>STM 206 x-RA</h1>
			03/11	dr	
			knitter-switch		<h2>30 23 26</h2>
Revised	05/16	dr			Page
Modifications	Date	Name			1/2

Specifications:

Contact rating: 6A, 125V AC; 3A, 250V AC
 Contact resistance: 20mOhm max. (1.5mA, 200µV AC; 1kHz)
 Insulation resistance: 1 000MOhm min. at 500V DC
 Dielectric strength: 1 000V AC (between terminals)
 1 500V AC (between terminals and ground) for 1 minute
 Operating temperature: -20°C to +80°C
 Mechanical life: 100 000 cycles min.
 Electrical life: 25 000 cycles min.
 Operating force: 2.5 +/-1.2N (250 +/-120gf)
 Material: Case: diallyl phthalate resin, green
 Fixed terminal: brass, silver plated
 Common terminal: brass, silver plated
 Plunger: brass, chrome plated
 Bushing: brass, nickel plated
 Frame: stainless steel
 Plate: brass, tin plated
 Contact: silver, silver plated

Compliance: RohS II (2011/65/EU)

Tolerances: ±0.15mm		Date	Name	<h1>STM 206 x-RA</h1>
		03/11	dr	
		knitter-switch		<h2>30 23 26</h2>
				Page 2/2
Modifications	Date	Name		