


P.C. LAYOUT

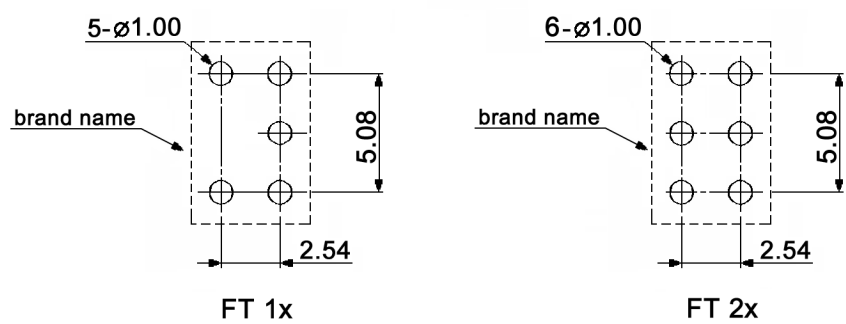

"x"	Switch function
D	on - on
E	on - off - on
F	mom - on
G	mom - off - mom
H	mom - off - on

Specifications:

Contact rating: max.: 0.4VA, 28V DC
 min.: 1µA, 20mV DC
Contact resistance: 100mOhm max.
Insulation resistance: 500MOhm min. at 250V DC
Operating temperature: -20°C to +80°C
Mechanical life: min. 30 000 cycles
Soldering conditions: auto-soldering: max.: 250 +/-5°C, 7sec.
 max.: 270 +/-5°C, 5sec.

The closed contacts are opposite to the lever position. For code F and H: "mom" is on the left hand side when looking at the brand name side.

Mounting: on pc-board
ESD resistance: 8kV min. (between lever and terminals)
Material: Contacts: phosphor bronze, gold plated
 Terminals: PC terminals, crimped, phosphor bronze, gold plated
 Case / lever: PES, UL94V-0, washable



Tolerances:	Date	Name	<h1>FT 1x. / FT 2x.</h1>
	08/08	dr	
			<h2>30 15 75</h2>
			Page
			1/1
Modifications	Date	Name	