


MARKING (EXAMPLE)

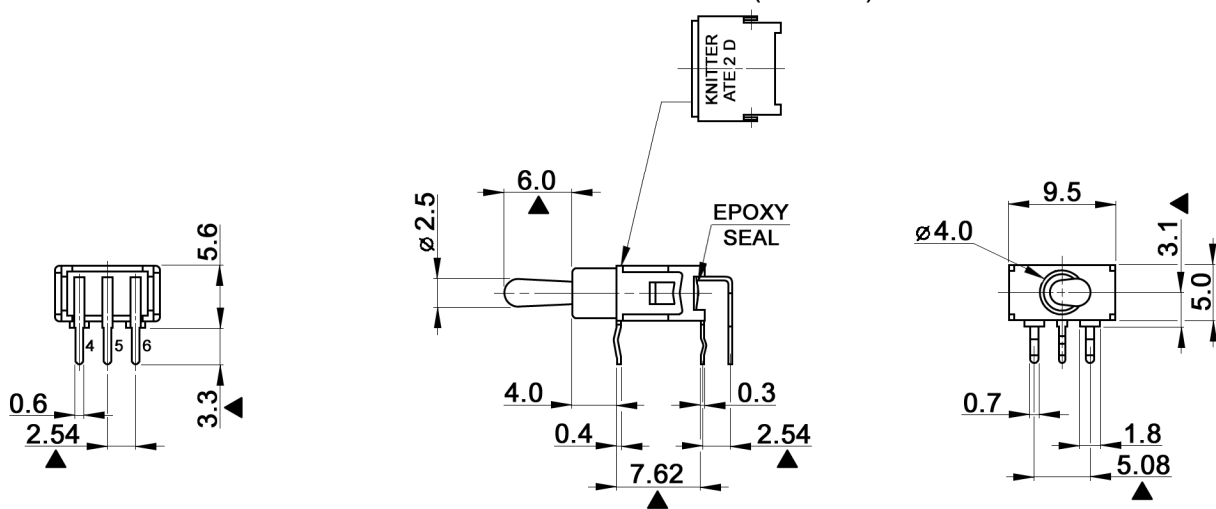

Toggle shown in pos. a

CONTACT ARRANGEMENT


code for x	function	toggle in pos. a	toggle in pos. c
D	On-On	2-3, 5-6	1-2, 4-5
F	On-Mom	2-3, 5-6	1-2, 4-5

code for x	function	toggle in pos. a	toggle in pos. b	toggle in pos. c
E	On-Off-On	2-3, 5-6	open	1-2, 4-5
G	Mom-Off-Mom			
H	On-Off-Mom			

Specifications:

- Contact rating: max.: 0.4VA, 48V AC or DC, 50mA  
min.: 1µA, 20mV AC or DC
- Contact resistance: 50mOhm max.
- Insulation resistance: 1000MOhm min.
- Dielectric strength: 500V RMS
- Operating temperature: -20°C to +85°C
- Electrical life: 40 000 make-and-break cycles
- Soldering conditions: wave-soldering: 260 +/-5°C, 5 +/-1sec.
- Protection: IP67
- Material: Actuator: brass, chrome plated  
Bushing / housing: steel  
Case: glass filled PBT (UL94V-0)  
Contact / terminals: phosphor bronze, gold plated over nickel barrier

P.C. MOUNTING



Compliance: RohS II (2011/65/EU)

Tolerances: 0.00: ±0.25mm 0.0: ±0.40mm	Date	Name
	03/14	dr
Revised	08/17	dr
Modifications	Date	Name

**ATE 2 x-RA**

**knitter-switch**

**30 30 55**

Page

1/1